




Pullstar Portable Hydraulic Winches

700 kg (1,540 lb)

Ingersoll Rand's hydraulic Pullstar winches offer solid, cast iron and steel construction in a compact package that is easy to deploy wherever you need it. These winches are tough enough to work reliably day in and day out no matter where you put them. They feature dependable orbital hydraulic motors for high efficiency performance. Trusted for years wherever there are extreme pulling needs, Ingersoll Rand hydraulic winches are the ideal choice.

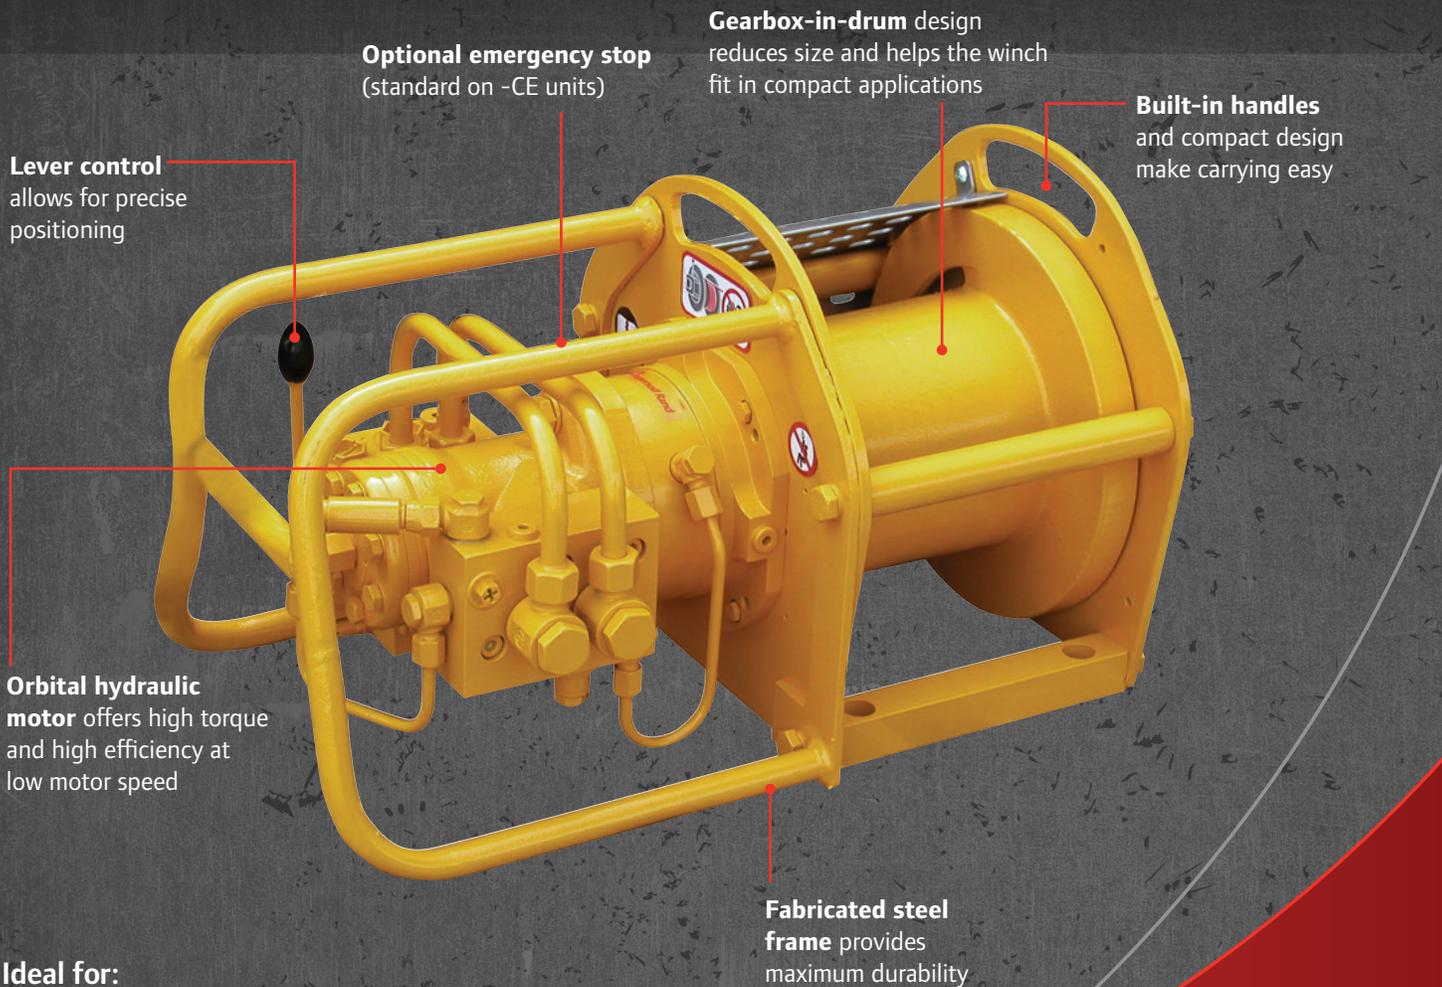

Ideal for:




Onshore



Offshore



Marine

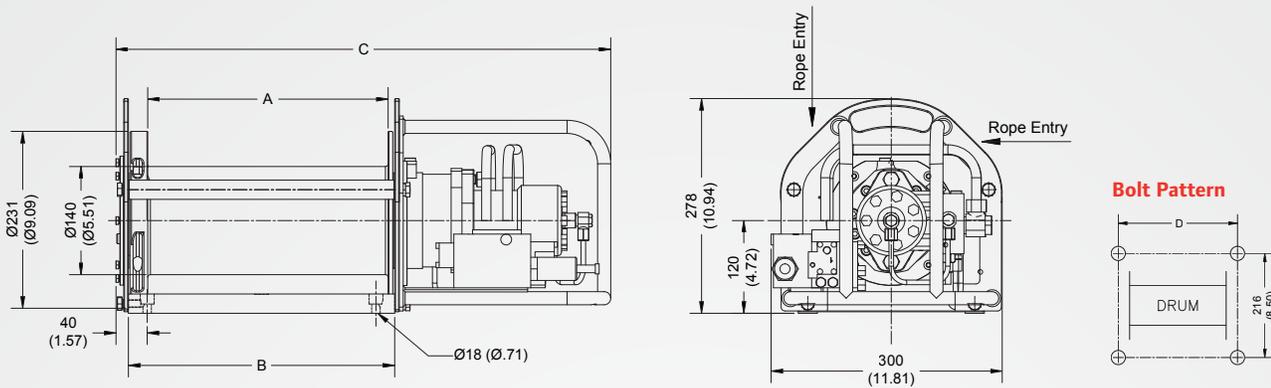

Models	A mm (in)	B mm (in)	C mm (in)	D mm (in)	# of Bolt Holes
PS2-1000H40-L	155 (6.10)	189 (7.44)	516 (20.31)	140 (5.51)	4
PS2-1000H40GC-L	311 (12.24)	351 (13.82)	672 (26.46)	296 (11.65)	4

Dimensions shown are mm. Dimensions in Brackets [] are inches. Dimensions are subject to change. Contact factory for certified drawings.

General Performance. Performance based on a 3.5:1 design factor

Model	Line Pull Capacity			Line Speed		
	First Layer kg (lb)	Mid Drum kg (lb)	Top Layer kg (lb)	First Layer m/min (fpm)	Mid Drum m/min (fpm)	Top Layer m/min (fpm)
PS2-1000H40-L	1,000 (2,200)	850 (1,870)	700 (1,540)	12 (39)	16 (52)	20 (66)
PS2-1000H40GC-L	1,000 (2,200)	850 (1,870)	700 (1,540)	12 (39)	16 (52)	20 (66)

General Characteristics. Performance based on 120 bar (1,740 psi) inlet pressure

Model	Motor Displacement cm ³ /rev (in ³ /rev)	Max Flow with Rated Load L/min (gal/min)	Operating Pressure bar (psi)	Drum Torque N-m (lb-ft)	Net Weight kg (lb)
PS2-1000H40-L	40 (2.44)	25 (6.6)	120 (1,740)	730 (538.4)	52 (115)
PS2-1000H40GC-L	40 (2.44)	25 (6.6)	120 (1,740)	730 (538.4)	59 (130)

Drum Capacity

Model	Minimum Rope Breaking Force ⁽¹⁾ kN (lbs)	Recommended Rope Diameter mm (in)	Drum Capacity per Layer ⁽²⁾ m (ft)					Max. Rope Storage Capacity ⁽³⁾ m (ft)
			Layer 1	Layer 2	Layer 3	Layer 4	Layer 5	
PS2-1000H40-L	34 (7,700)	6.5 (1/4)	9 (30)	20 (66)	32 (105)	45 (148)	58 (190)	89 (292)
PS2-1000H40GC-L	34 (7,700)	6.5 (1/4)	19 (62)	42 (138)	66 (217)	93 (305)	121 (397)	183 (600)

⁽¹⁾ Recommended minimum breaking force of wire rope based on top layer line pull rating.

⁽²⁾ Drum Capacity is based on tightly wound wire rope and 1/2" freeboard from the top of the flange to the top layer. Recommended drum working capacity is 80% of values shown.

⁽³⁾ Max storage capacity is tightly wound with no freeboard.

How to Order

PS2 - 1000H 40 GC - L - GQZ

Model Series
PS2 2nd
Generation

Capacity
1000H 1,000 kg

Motor
Displacement
40 40 cm³

Drum
No letter
Standard
GC Long drum

Control type
L Lever control
DPxxM Full flow remote control
JCxxM Full flow remote control
xxM Specify hose length
needed in meter

Options
CM Low temperature design (-20°C).
G Drum guard
K Skid frame
L Automatic spooling device
M Material traceability certificates as per
EN 10204 3.1 on main load bearing parts.
P Marine paint finish.
QZ Offshore paint including sandblasting.
R Press roller
W1 ABS witness test.
W2 DNV witness test.
W3 LRS witness test.
W4 Client witness of load test.
16 Drum grooving (Number = rope size in mm)



For More Information www.ingersollrandproducts.com/lifting lifting@irco.com

Ingersoll Rand, IR, the IR logo and Impactool are trademarks of Ingersoll Rand, its subsidiaries and/or affiliates. All other trademarks are the property of their respective owners. Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll Rand's standard terms and conditions of sale for such products, which are available upon request. Product improvement is a continuing goal at Ingersoll Rand. Designs and specifications are subject to change without notice or obligation. Unless otherwise noted this equipment is not designed for transporting people or lifting loads over people. It is the user's responsibility to determine the suitability of this product for any particular use and to check compliance with applicable regulations. Before installation, see maintenance and operations manual for additional warnings and precautions.