



Pullstar Portable Air Winches

700 - 1,700 kg (1,540 - 3,755 lb)

Adjustable drum guard— optional but recommended for all applications (standard with CE option)

Lift-to-Shift variable speed lever provides precise control and built-in safety

Emergency stop and overload protection for enhanced safety (standard with CE option)

Manual clutch for rapid pay out

Reliable gear type air motor designed for even the harshest environments

High efficiency planetary gear box and automatic disc brake ensure smooth operation

Standard internal muffler reduces noise level

Strong yet compact design allows winch to work in tight spaces

Robust steel construction built to operate in temperatures down to -20C (2,400kg model only)

Ideal for:



Mining



Offshore



Marine






Pullstar Portable Air Winches



700 - 1,700 kg (1,540 - 3,755 lb)

Ingersoll Rand Pullstar portable winches are built for use on horizontal surfaces with little to no incline. Featuring a rugged, compact design Pullstar portable winches can easily be moved to wherever you need them. Pullstar portable winches include a highly reliable gear motor and a free spooling clutch for rapid manual rope pay out. The PS2-2400R is designed to operate in temperatures down to -20 °C. The CE version of the PS2-2400R is also suitable for ATEX group II (non-mining) category 2 applications and ATEX group I (mining) category M2 applications.

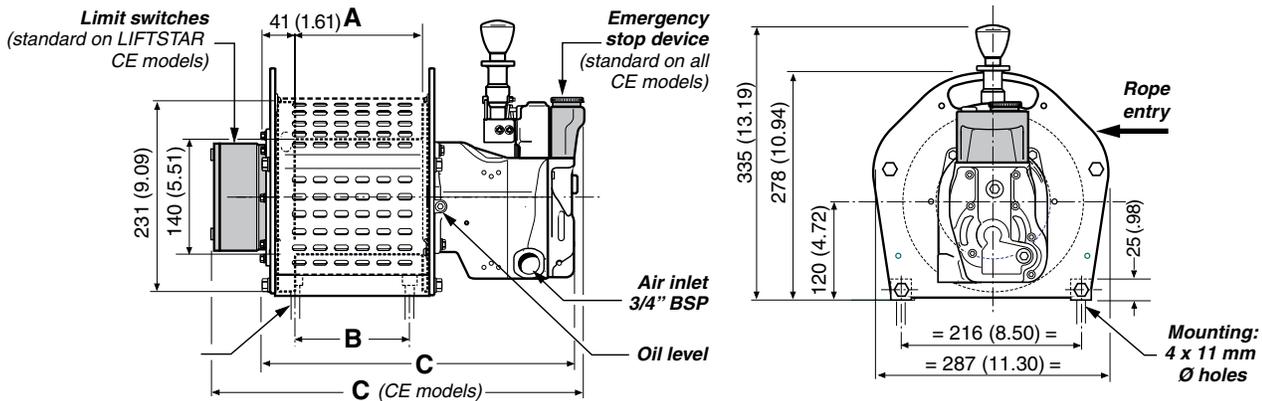

CE Models	A mm (in)	B mm (in)	C mm (in)
PS2-1000R-L-E	155 (6.10)	140 (5.51)	427 (16.81)
PS2-1000RCG-L-E	311 (12.24)	296 (11.65)	583 (22.95)

Non CE Models	A mm (in)	B mm (in)	C mm (in)
PS2-1000R-L	155 (6.10)	140 (5.51)	392 (15.43)
PS2-1000RCG-L	311 (12.24)	296 (11.65)	548 (21.57)

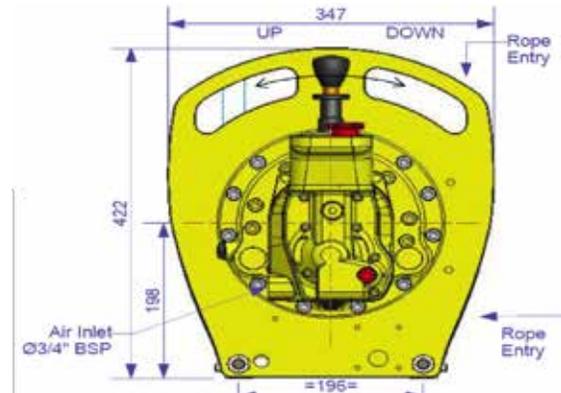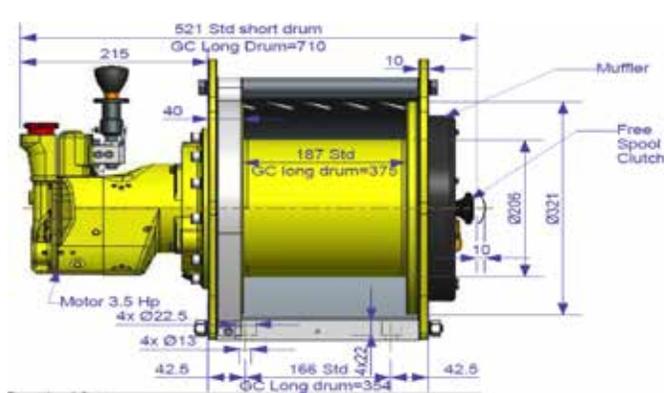

CE Models	A mm (in)	B mm (in)	C mm (in)
PS2-2400R-L-E	187 (7.36)	166 (6.54)	521 (20.51)
PS2-2400RCG-L-E	375 (14.76)	354 (13.94)	710 (27.95)

Non CE Models	A mm (in)	B mm (in)	C mm (in)
PS2-2400R-L	187 (7.36)	166 (6.54)	486 (19.13)
PS2-2400RCG-L	375 (14.76)	354 (13.94)	675 (26.57)

Dimensions shown are mm. Dimensions in Brackets [] are inches. Dimensions are subject to change. Contact factory for certified drawings.

Options and Accessories



Drum Guard



Airline Accessories



Pendant

General Performance. Performance based on a 3.5:1 design factor

Model	Line Pull Capacity			Line Speed		
	First Layer kg (lb)	Mid Drum kg (lb)	Top Layer kg (lb)	First Layer m/min (fpm)	Mid Drum m/min (fpm)	Top Layer m/min (fpm)
PS2-1000R-L	1,000 (2,200)	850 (1,870)	700 (1,540)	12 (41)	16 (53.5)	20 (66)
PS2-1000RGC-L	1,000 (2,200)	850 (1,870)	700 (1,540)	12 (41)	16 (53.5)	20 (66)
PS2-2400R-L	2,400 (5,280)	2150 (4,730)	2000 (4,400)	5 (17)	5.5 (18)	6 (20)
PS2-2400RGC-L	2,400 (5,280)	2150 (4,730)	2000 (4,400)	5 (17)	5.5 (18)	6 (20)

General Characteristics. Performance at 6.3 bar (90 psi) air inlet pressure with the motor running

Model	Motor	Lifting Speed at Top Layer	Air Consumption with Rated Load	Air Volume Needed to Move Rated Load at Top Layer	Sound Level as per EN 14492-1	Net Weight
	kW (hp)	m/min d(fpm)	m ³ /min (ft ³ /min)	3 m (10 ft)	dB(A)	kg (lb)
PS2-1000R-L	2.6 (3.5)	20 (66)	4 (141)	0.6 (21.4)	92	38 (84)
PS2-1000RGC-L	2.6 (3.5)	20 (66)	4 (141)	0.6 (21.4)	92	45 (99)
PS2-2400R-L	2.6 (3.5)	6 (20)	4.8 (169)	2.4 (84.8)	90	85 (187)
PS2-2400RGC-L	2.6 (3.5)	6 (20)	4.8 (169)	2.4 (84.8)	90	100 (220)

Drum capacity

Model	Minimum Rope Breaking Force ⁽¹⁾ kN (lbs)	Recommended Rope Diameter mm (in)	Drum Capacity per Layer ⁽²⁾ m (ft)					Max. Rope Storage Capacity ⁽³⁾ m (ft)
			Layer 1	Layer 2	Layer 3	Layer 4	Layer 5	
PS2-1000R-L	34 (7,700)	6.5 (1/4)	9 (30)	20 (66)	32 (105)	45 (148)	58 (190)	89 (292)
PS2-1000RGC-L	34 (7,700)	6.5 (1/4)	19 (62)	42 (138)	66 (217)	93 (305)	121 (397)	183 (600)
PS2-2400R-L	84 (18,880)	11 (7/16)	8 (26)	20 (66)	33 (108)	46 (151)	60 (197)	60 (197)
PS2-2400RGC-L	84 (18,880)	11 (7/16)	20 (66)	43 (141)	70 (230)	98 (322)	127 (417)	127 (417)

⁽¹⁾ Recommended minimum breaking force of wire rope based on top layer line pull rating.

⁽²⁾ Drum Capacity is based on tightly wound wire rope and 1/2" freeboard from the top of the flange to the top layer. Recommended drum working capacity is 80% of values shown.

⁽³⁾ Max storage capacity is tightly wound with no freeboard.

How to Order

PS2		1000R		GC		PH		5M		PJ12-E	
Model Series	Capacity	Drum	Control type	Control length	Options						
PS2 Pullstar 2nd Generation	1000R 1000 kg 2400R 2400 kg	No letter Standard GC Long drum	L Lever control PH Alloy precision PHS pendant PHR Cast iron precision PHS pendant	5M 5 meters (for pendant controlled winch)	CM Cold weather with material traceability G Drum guard for non-CE models J12 Filter + lubricator (shipped loose) J123 Filter + lubricator + regulator (shipped loose) JF123 Filter + lubricator + regulator (fitted on winch, applies to 2400 kg model only) JF1236 Filter + lubricator + regulator + water separator (fitted on winch, applies to 2400 kg model only) M 3.1 material traceability certificates as per EN 10204 on main load bearing parts P Marine paint finish QZ Offshore paint including sandblasting V Press roller (2400 kg model only)	W1 ABS witness test W2 DNV witness test W3 LRS witness test W4 Client witness of load test -E For Compliance with the European Machinery Directive for Pullstar pulling models					

Special Orders



A significant portion of our business is providing customized solutions for specific applications. We recognize that not all jobs are created equal and that the most cost-effective solutions may not be in an off-the-shelf item. We've designed and manufactured winches and hoists for applications as simple as moving bags of lettuce, to as intricate as installing critical payloads on space vehicles, including high capacity loads 100 tons and above.

- Design for custom capacities
- Custom control systems
- Custom product modifications
- Witness testing and complete certification to most global standards
- Full data package with CAD drawings
- Dedicated project management for your project from conception to delivery
- Onsite services available including presale and evaluation



For More Information www.ingersollrandproducts.com/lifting lifting@irco.com

Ingersoll Rand, IR, the IR logo and Impactool are trademarks of Ingersoll Rand, its subsidiaries and/or affiliates. All other trademarks are the property of their respective owners. Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll Rand's standard terms and conditions of sale for such products, which are available upon request. Product improvement is a continuing goal at Ingersoll Rand. Designs and specifications are subject to change without notice or obligation. Unless otherwise noted this equipment is not designed for transporting people or lifting loads over people. It is the user's responsibility to determine the suitability of this product for any particular use and to check compliance with applicable regulations. Before installation, see maintenance and operations manual for additional warnings and precautions.